




## EASY SETUP GUIDE


---

### RPX

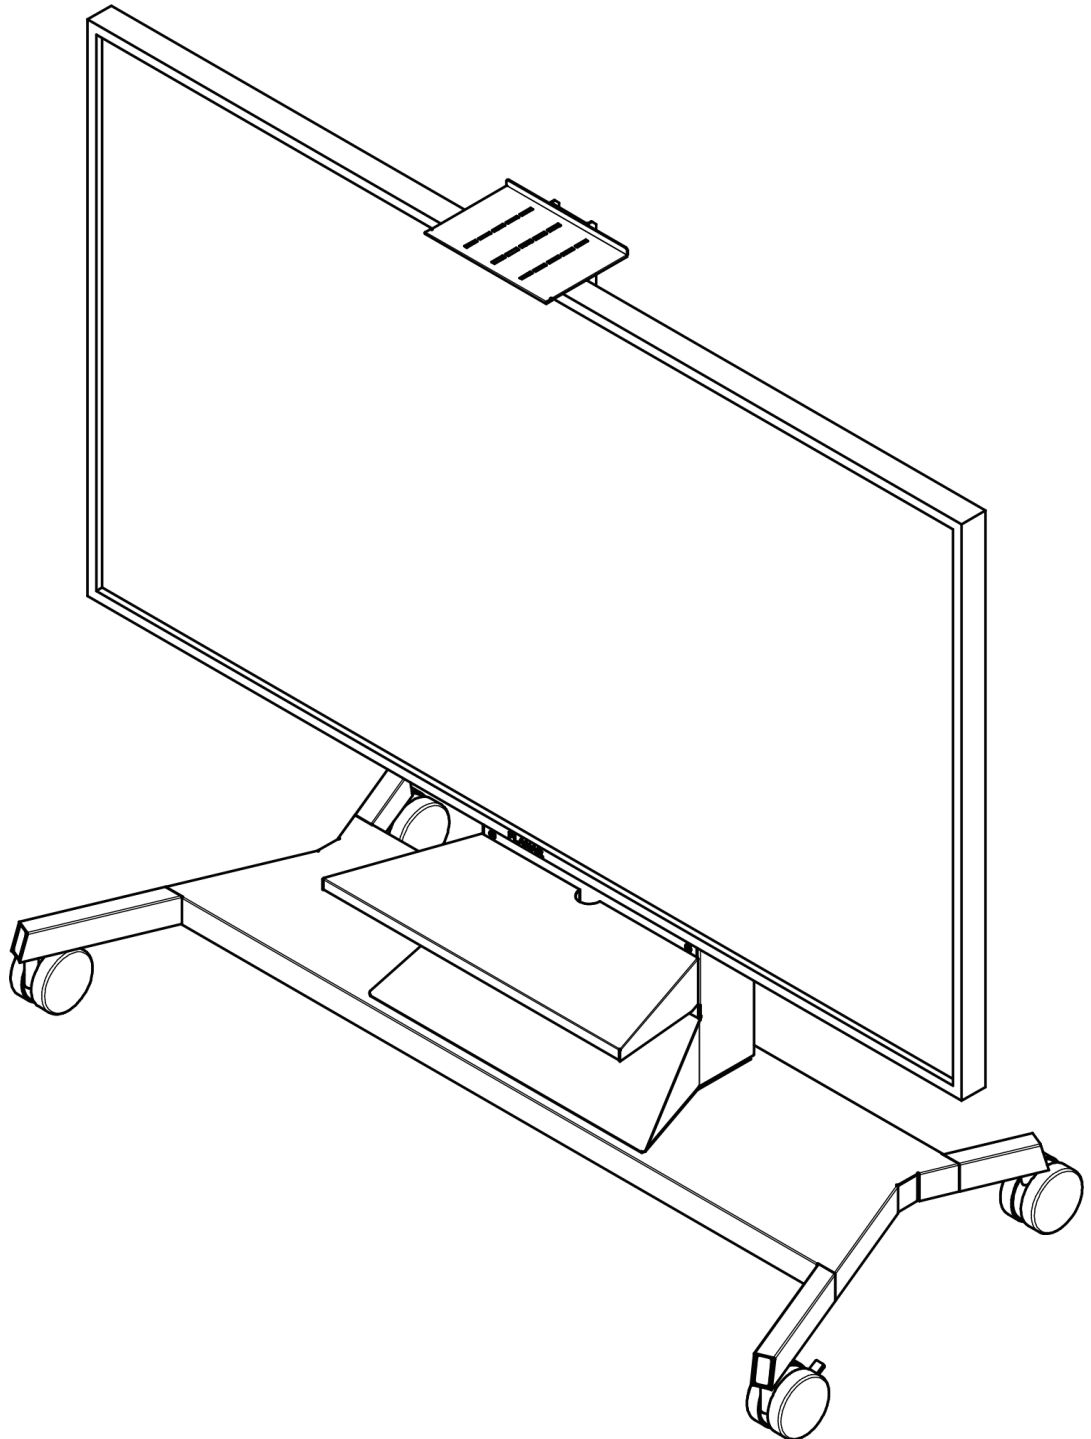


Items not included:  
- Phillips screw driver

# Items included

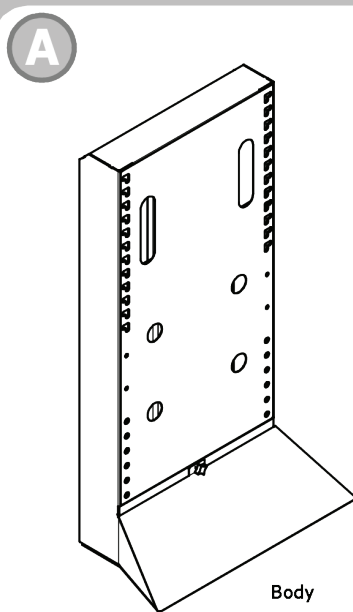


x1

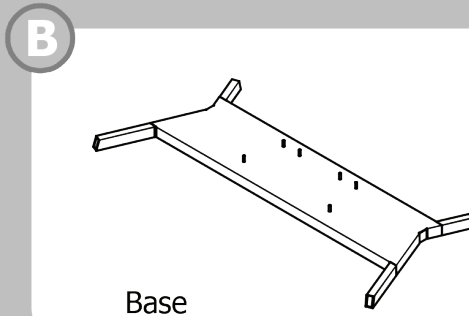


x1




x1



x1

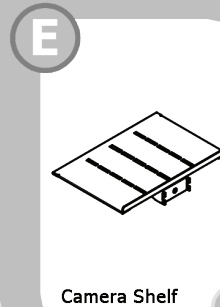

x1

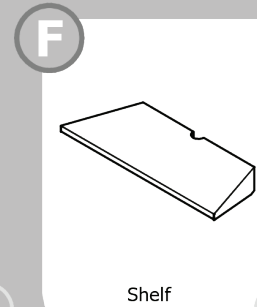

x1



x6




x4



x5



x1




x4



x1

1


Install the casters as shown, using the multi rench (J)

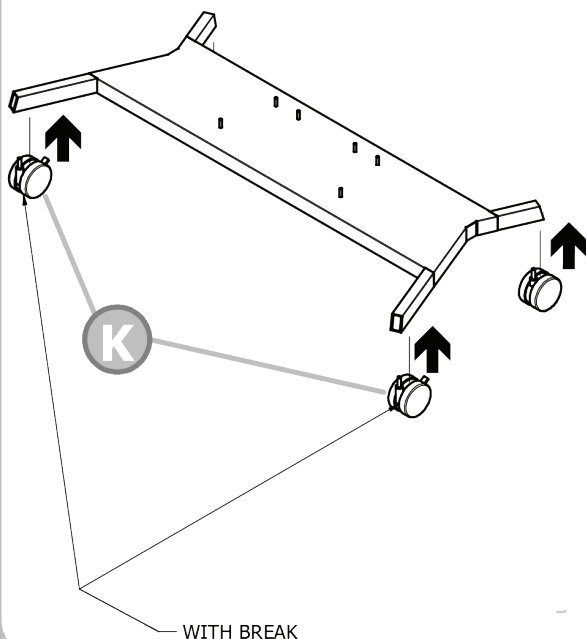


2

Attach the body (A) to the base (B) with the nut (G)




Disassemble the cover as shown

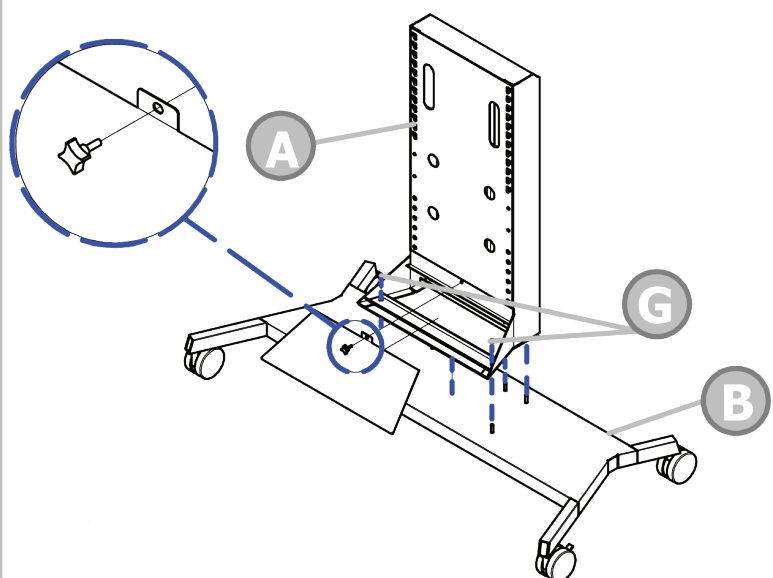

- 3** Attach the Shelf (**F**) to the body as shown, then secure with screw (**I**)


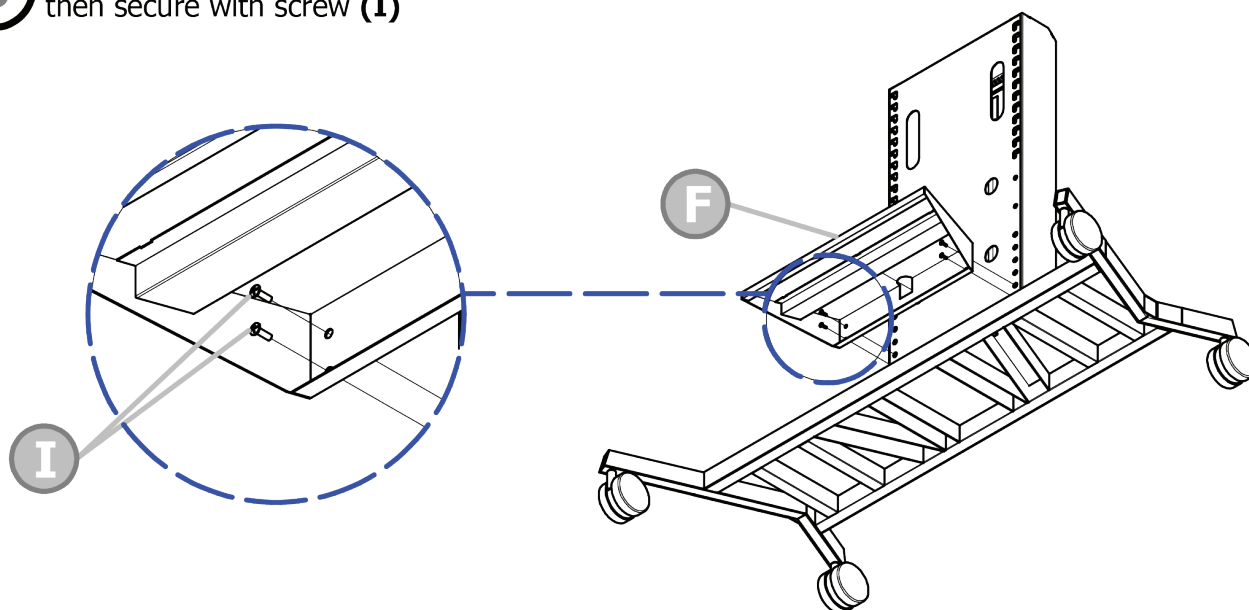


- 4** Install the mount with kit (**H**) and install the support camera (**E**)

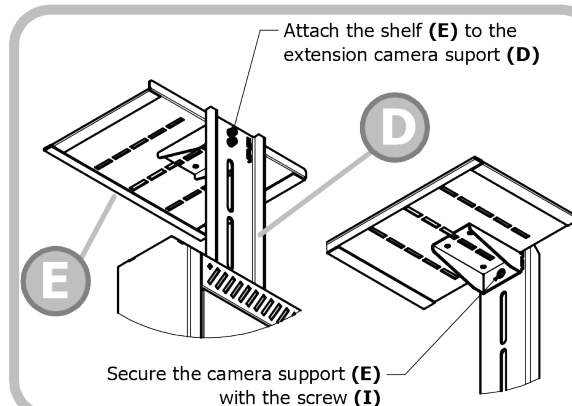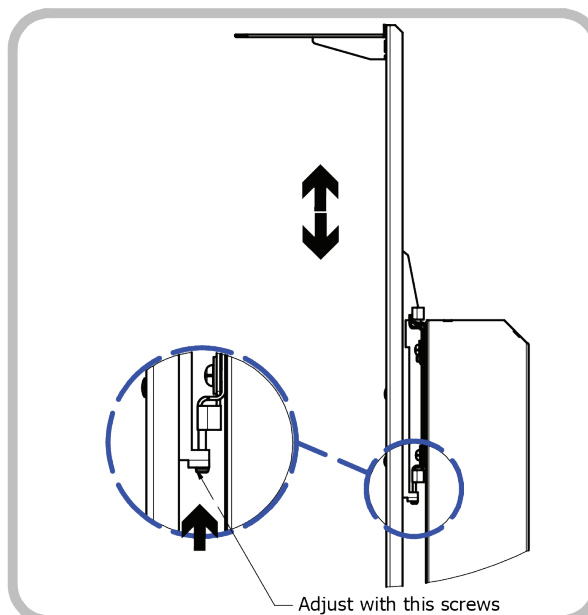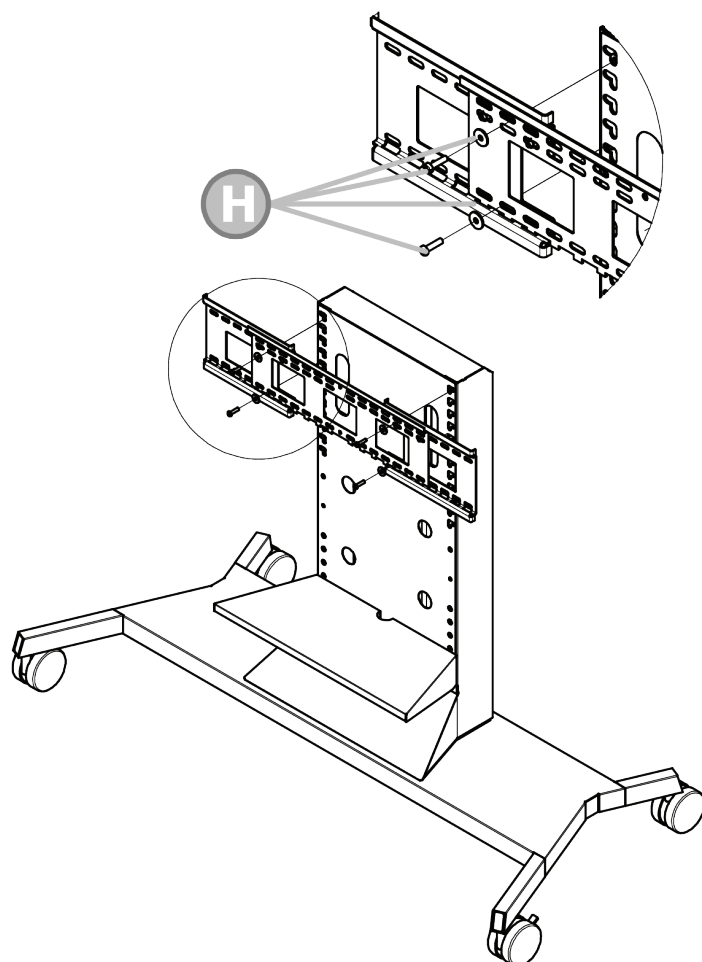

5


## Lock Assembly

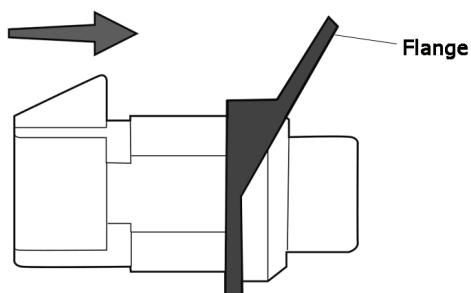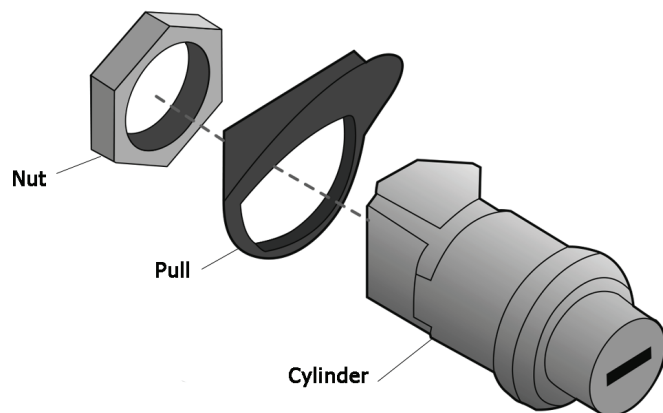

**Slide the pull over the cylinder, making sure the flange is positioned as shown in the diagram.**

6

**Slide the cylinder through the hole in the glass door as shown.**

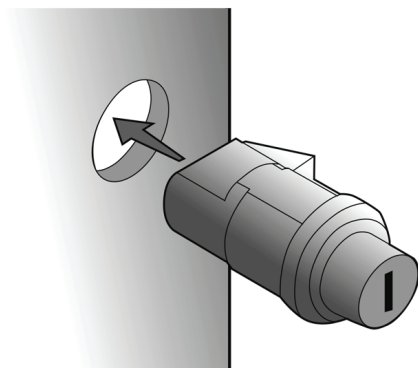

7

**Twist the nut onto the cylinder. Ensure that it is placed in the correct position, as shown.**

