





EASY SETUP GUIDE

DynamiQ RPS-500

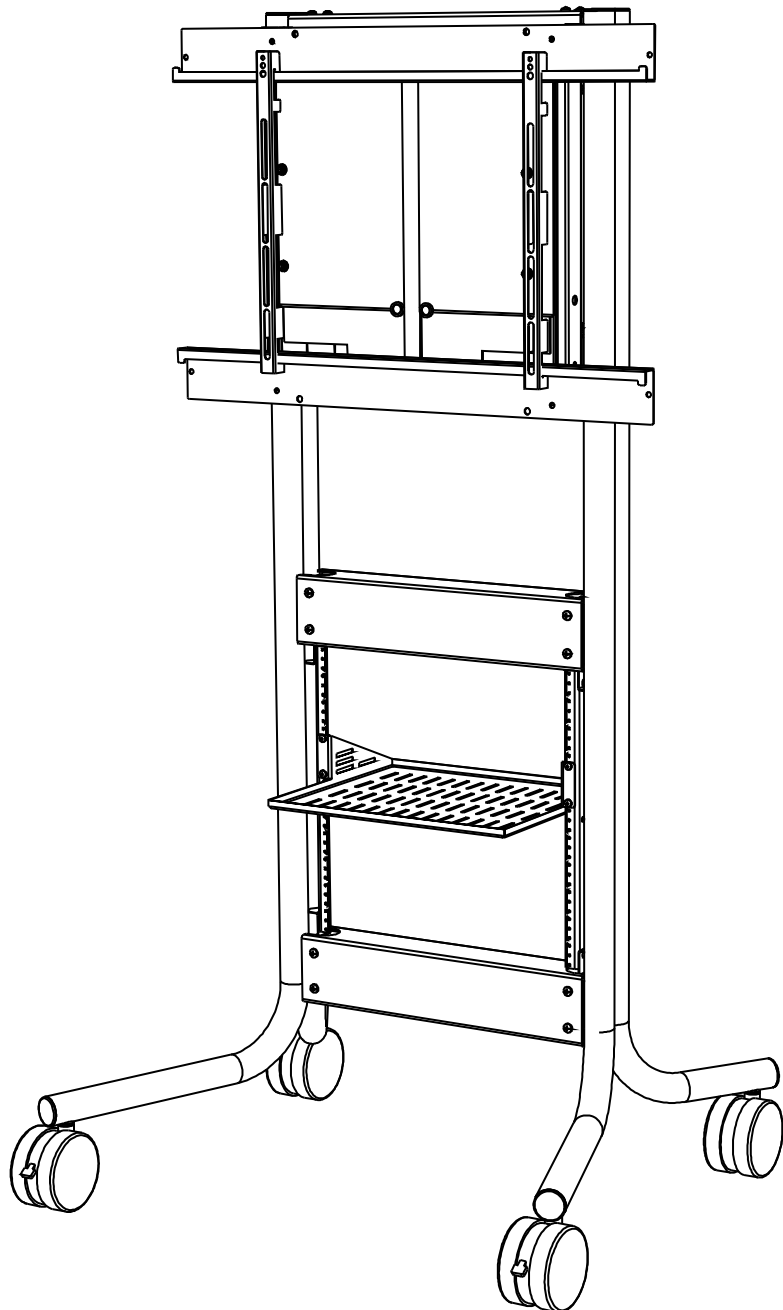

Items needed for install
- Phillips screw driver
- Wrench 3/4"


Items
Included

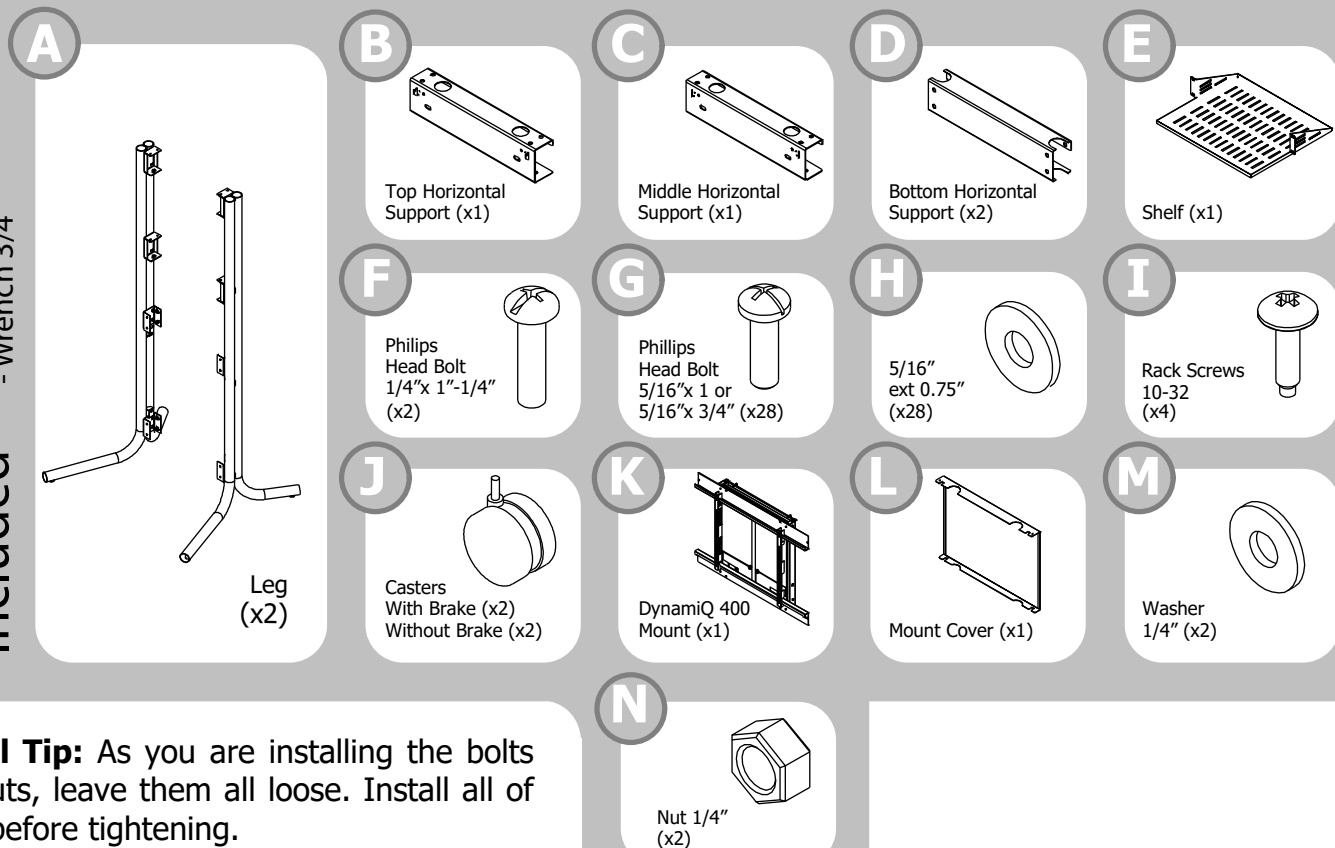


Install Tip: As you are installing the bolts and nuts, leave them all loose. Install all of them before tightening.

1

Attach Casters (**J**) to the end of each Leg (**A**). Make sure the Casters with Brakes are installed in the front of the cart.

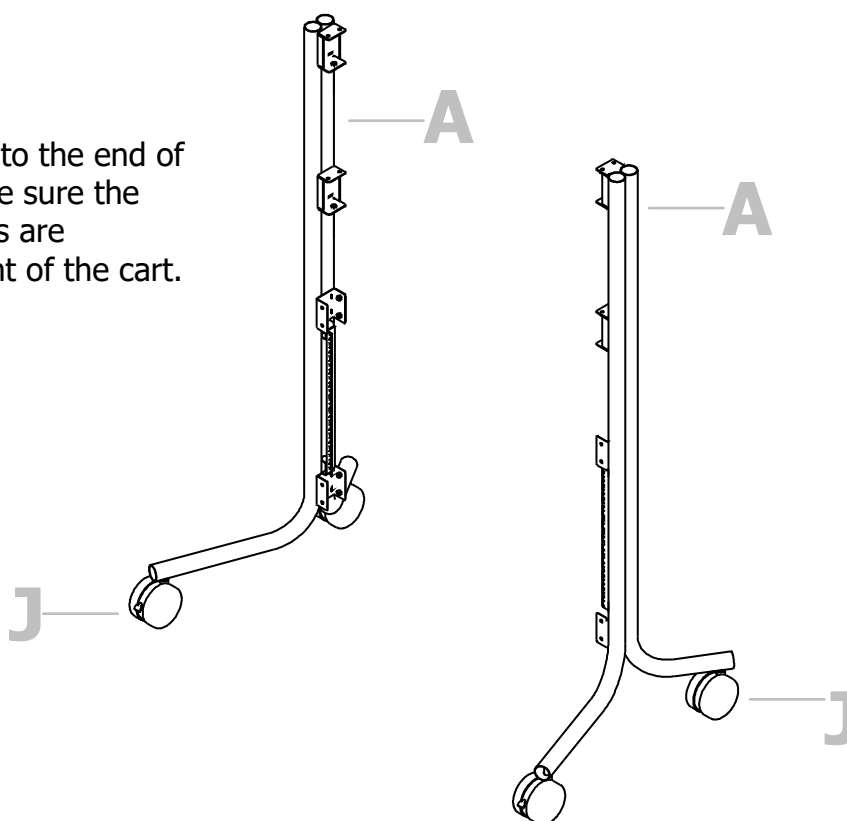


2

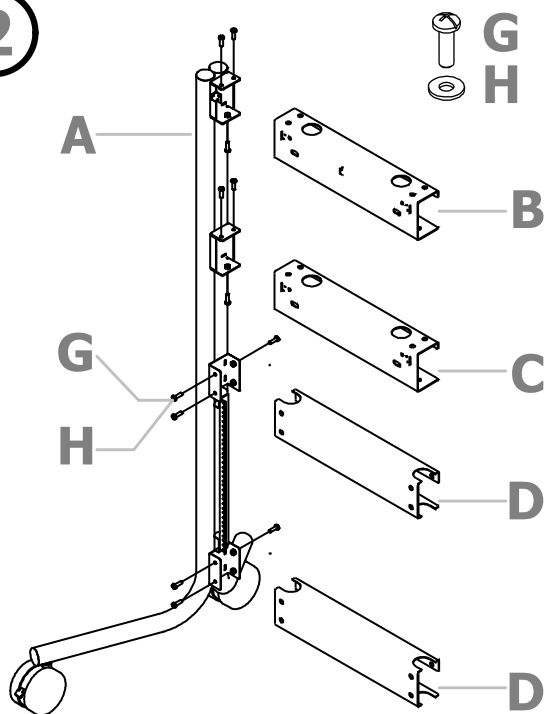


Attach each of the Horizontal Supports **(B) (C) (D)** to the first Leg **(A)** using the Bolts **(G)** and Washers **(H)** as shown. Make sure the flat side of each support is facing the front of the cart.

3

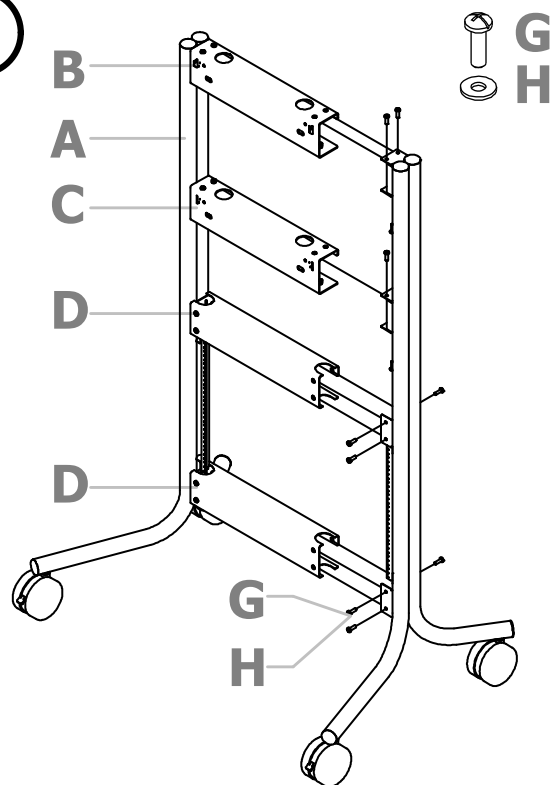


Attach the other Leg **(A)** to the Horizontal Supports **(B) (C) (D)** using the Bolts **(G)** and Washers **(H)** as shown.

4

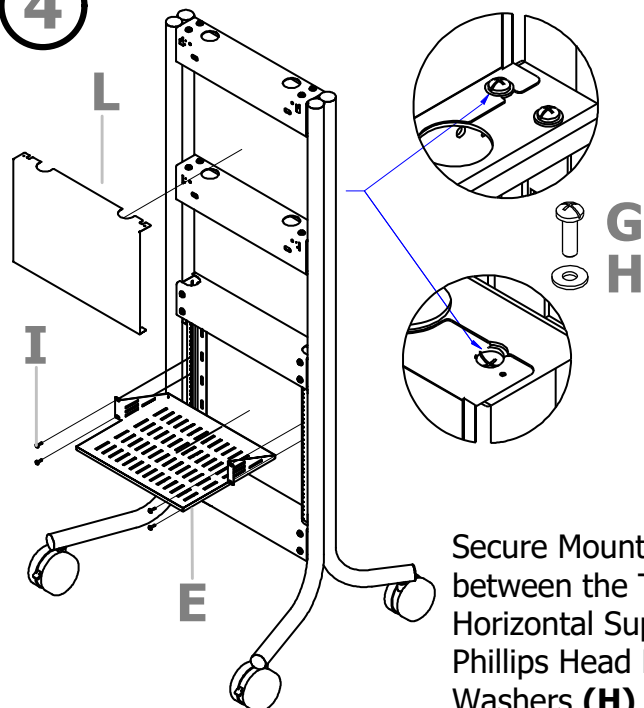

Secure Mount Cover **(L)** between the Top and Middle Horizontal Supports using the Phillips Head Bolts **(G)** and Washers **(H)** as shown.


Install the Shelf **(E)** to the vertical rack rails using the Rack Screws **(I)**.

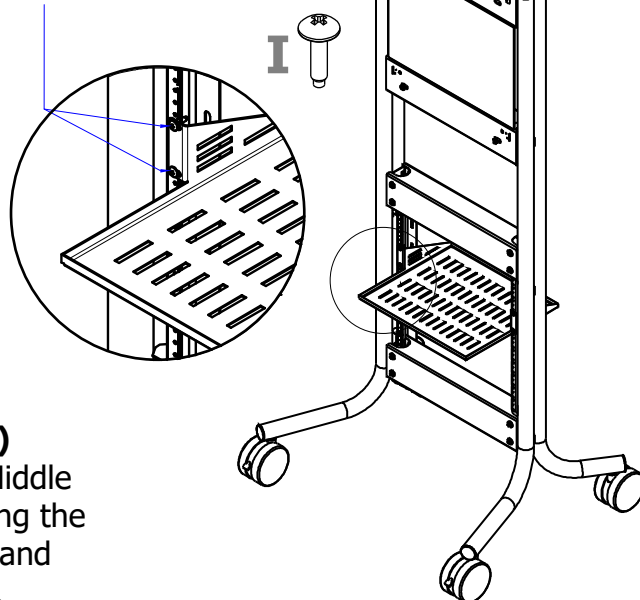


5

Hook on Top Horizontal Support


Hole in DynamiQ 400 mount

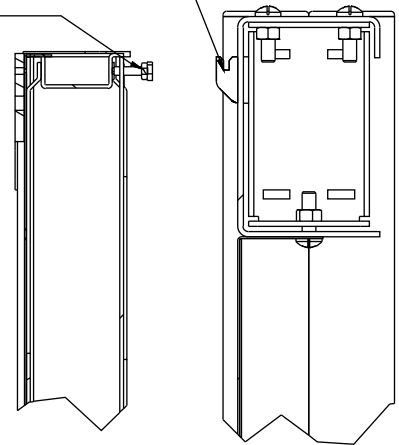

Attach the DynamiQ 400 Mount (**K**) to the frame by aligning the holes on each side of the mount with the hooks on the top Horizontal Support.

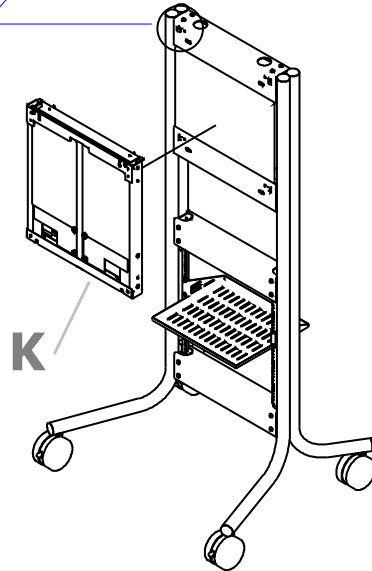

Hang mount to frame




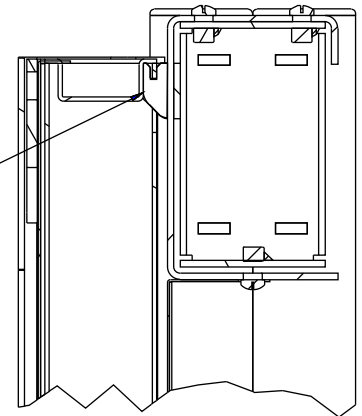


6

FRONT CART

REAR CART

Secure with Bolt (**F**), Washer (**M**) and Nut (**N**).

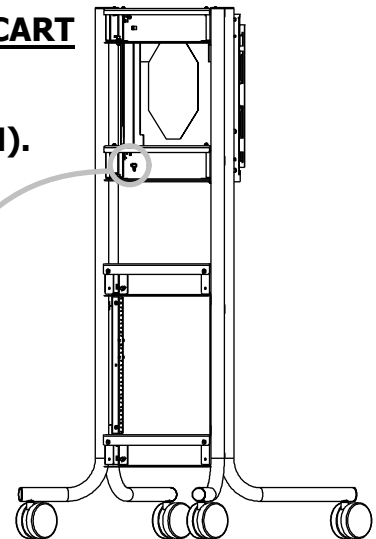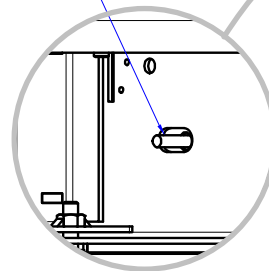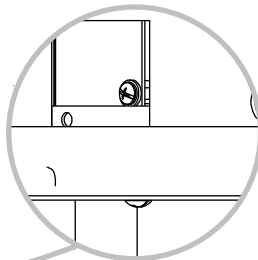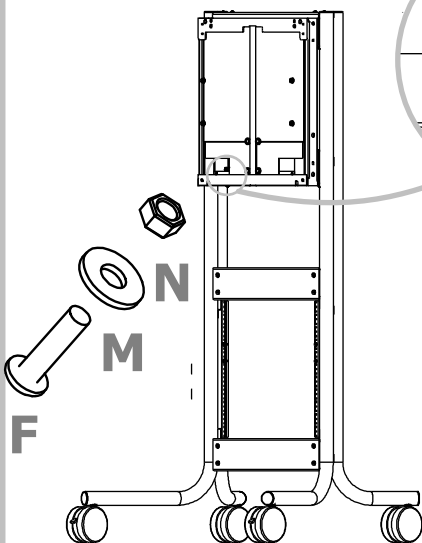

7

Please refer to the instructions in the BB VESA mount for VESA mount assemble and please refer to the instructions in the DynamiQ/BalanceBox 400 series mount for adjusting the DynamiQ mount. See UM-1 Adaptor and CSB Mount Instructions if using cart with Cisco boards