




EASY SETUP GUIDE









UM - 1

Revision 00, July 30-2025

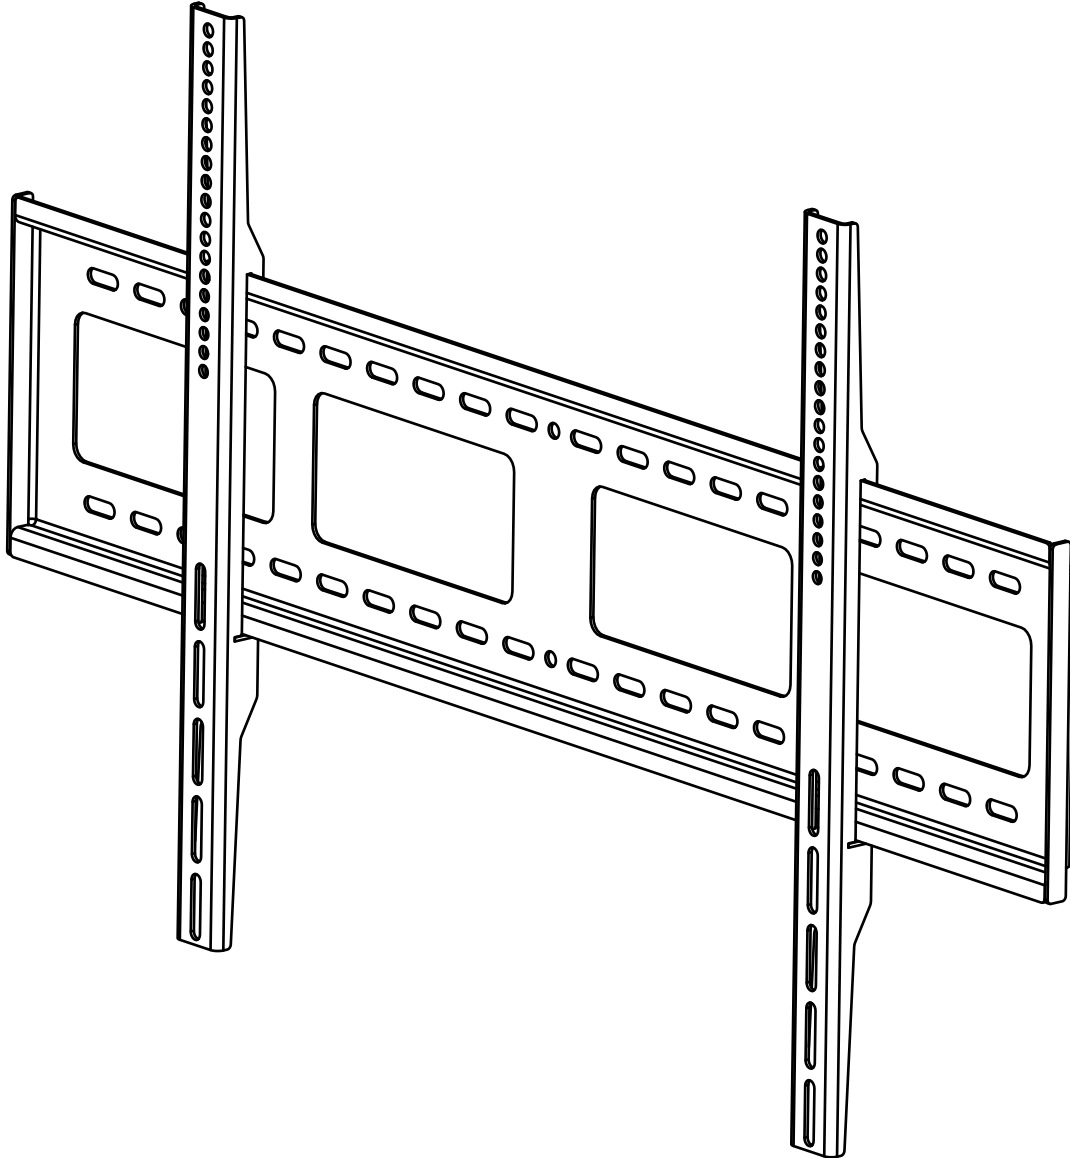


Items Included

Items needed for install
 - Power drill- Spirit level
 - 10mm or 6mm drill bit
 - Philips head screwdriver

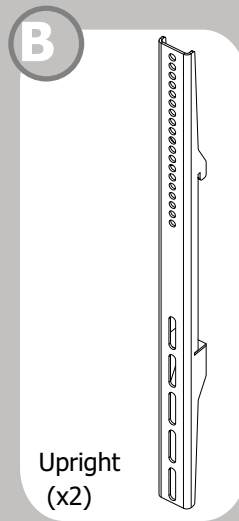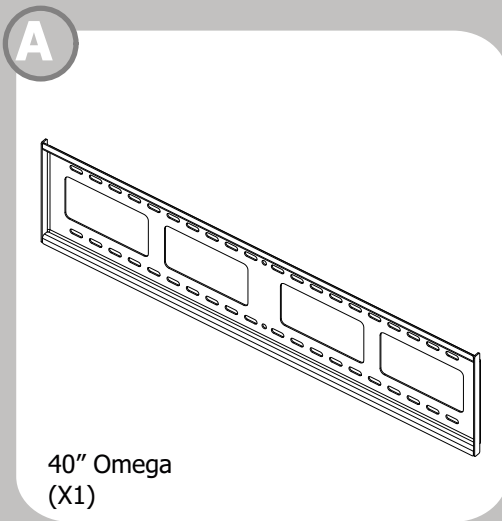


1

TIP: Use a spirit level to ensure the omega is horizontal and center.

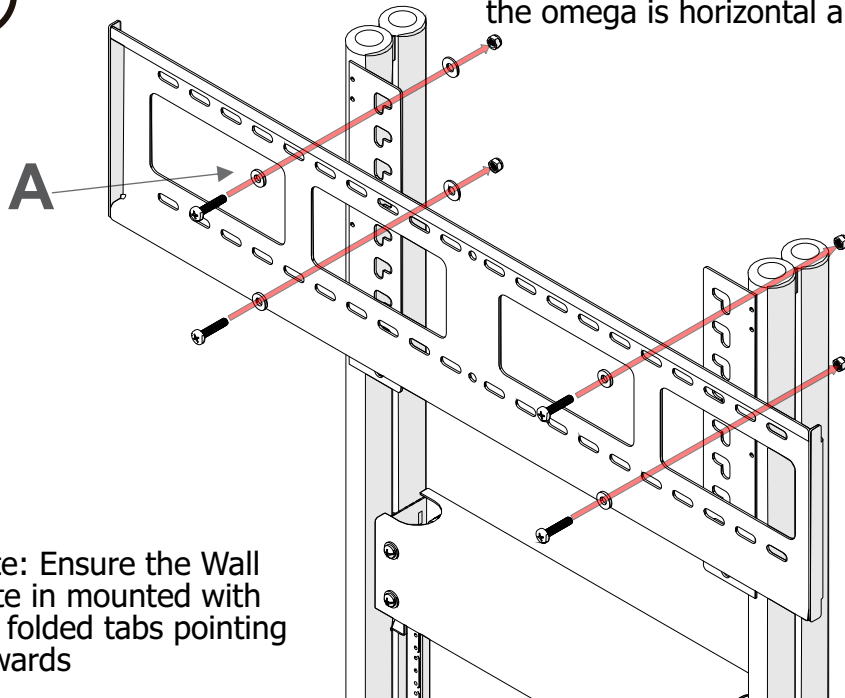


Note: Ensure the Wall Plate is mounted with the folded tabs pointing upwards

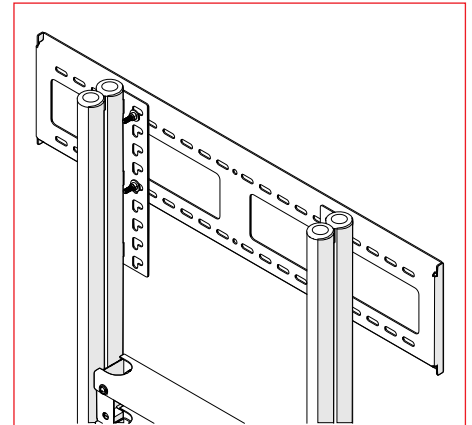



Mounting the 40/26" Omega (**A**) to the cart provisions with the 5/16" Screw, place a 5/16" washer on the front and a 5/16" washer on the back and tightened with the flange nut on the back. (**5/16" hardware included on the cart hardware**)

2 Mounting the Display Brackets

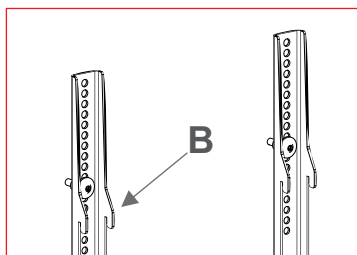

NOTE:

When attaching the mounting screws to the display, make sure the direction of Brackets is right and ensure that both brackets are vertically aligned.

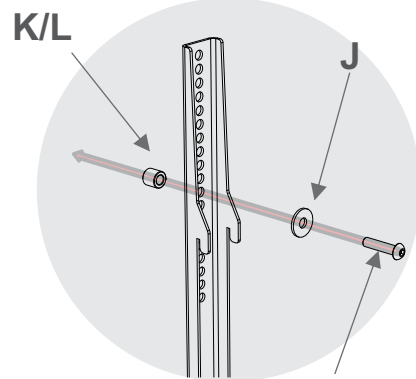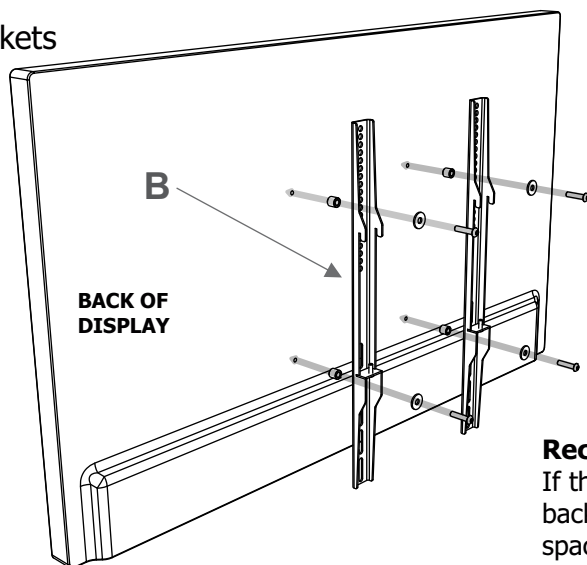


D/E/F/G/H/I

Recessed mounting holes.


If the mounting holes are recessed into the back of the display, use the supplied spacers to pack the recessed hole.

3 Attaching the Display to the Wall Plate

Note: This procedure will require two persons


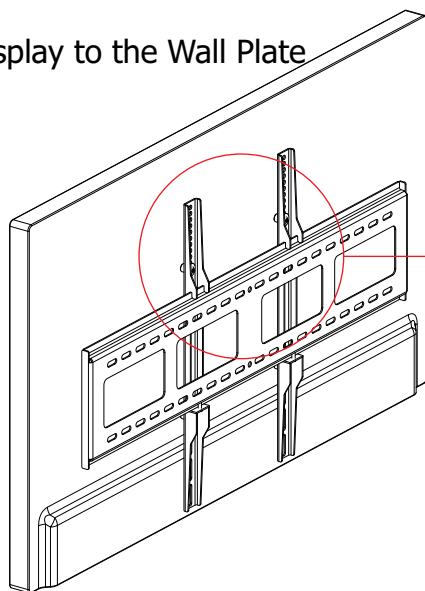


Can be adjusted freely

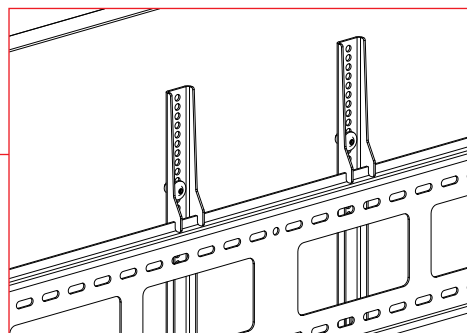

With the Brackets attached to the display, lift the display and hook the brackets onto the Wall Plate as shown.

6 Security Option

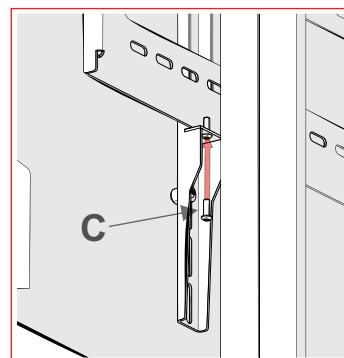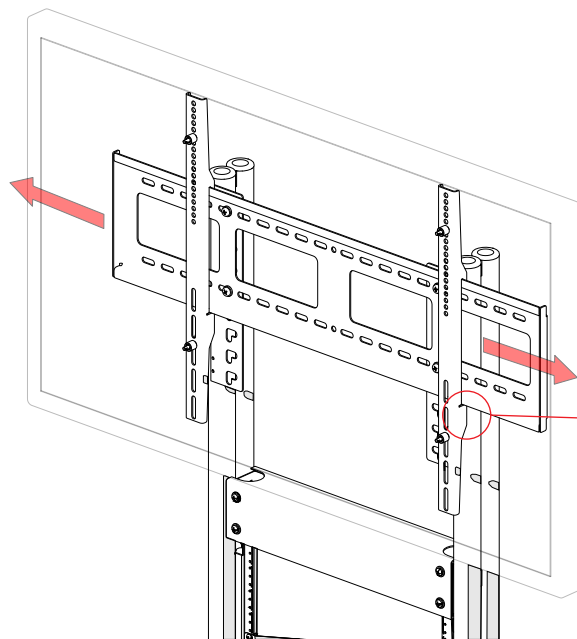

Adjust the display to the sides to the desired position and use the bolt (E) to secure the uprights (B)